

Avantis 20 mflex sl

Avantis 20 Mflex SL

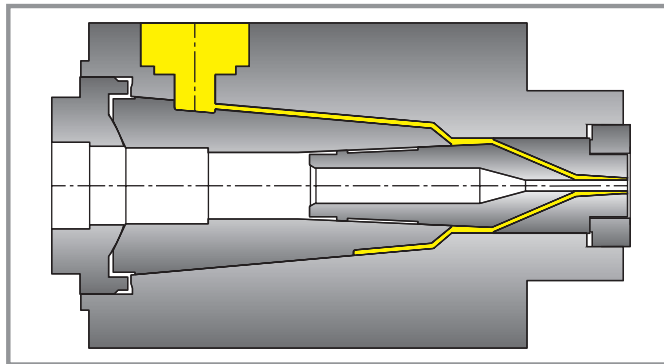
Min conductor	0.2 mm	0.010"
Max conductor	12 mm	0.480"
Max over insulation	16 mm	0.630"
Max tube die diameter	20 mm	0.800"

Use

Insulation	Solid and stranded wires
Domain of use	Jacketing
	CATV - Coaxial cables - RG
	Automotive wires
	Building wires
	Calibrated tubes
	Flexible tubes
	Zip cords
	Profiled cables
	Optical fibers, loose or tight
	Mono fiber - Multi fibers
Compound	PVC / PE / PBT / PA / LSZH...

Characteristics
Avantis 20 Mflex SL

Mflex	Microflex system for 100% concentricity
SL	Single Layer
Distribution mono-flow	Conical distribution cartridge Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

Design

Options

Connections	Connecting flanges for any type of extruder
By-Pass	Manual - Pneumatic - Hydraulic
Distributors	Special distribution cartridges for LSZH, PA...
Tooling	Hardened steel - Tungsten carbide - Diamond Compression - Semi-compression - Tube High concentricity level Design recommendation on request
Jelly injection system	Changeable entry and exit micro-tubes Special support with x and y axis adjustment of exit micro-tube, to guarantee accurate and constant fiber centering
Accessories	Vacuum adapter Assembly and disassembly cleaning kit
Spare Parts	Permanent stock - 24 hours delivery
Services	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

