

# MF 9000-20 BG

## MF 9000-20 BG

<b>Min conductor</b>	0.2 mm	0.010"
<b>Max conductor</b>	12 mm	0.500"
<b>Max over insulation</b>	16 mm	0.630"
<b>Max tube die diameter</b>	20 mm	0.800"



## Use

<b>Insulation</b>	Solid and stranded wires
<b>Domain of use</b>	Jacketing
	Building wires
	Energy cables
	Flexible cables
	Hoses with nylon mesh
<b>Compound</b>	PVC / PE / LSZH...

## Characteristics **MF 9000-20 BG**

<b>MF</b>	Fixed centering
<b>BG</b>	Filling & Sheathing
<b>BGS</b>	Filling & Sheathing + <b>Stripe(s)</b>
<b>Distribution</b>	Conical distribution cartridge
<b>mono-flow</b>	Easy to clean - no dead spots
	Constant and smooth compound flow
	No stress and no shear in the melted compound
<b>Gum Space</b>	Front and rear axial die adjustment

## Design

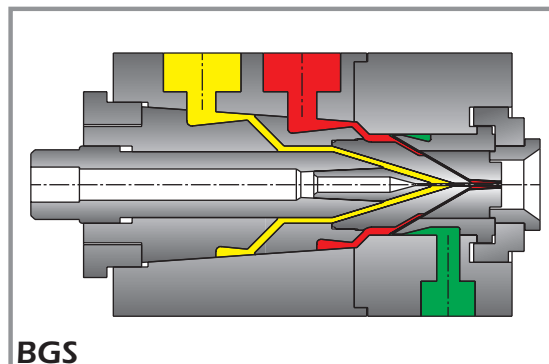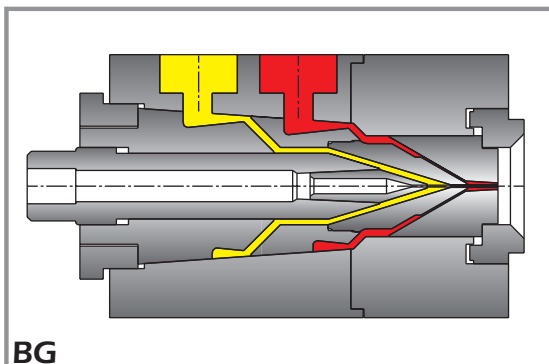

## Options

<b>Connections</b>	Connecting flanges for any type of extruder
<b>By-Pass</b>	Manual - Pneumatic - Hydraulic
<b>Distributors</b>	Special distribution cartridge for <b>LSZH</b> Mono distribution cartridge for single layer
<b>Tooling</b>	Hardened steel - Tungsten carbide Compression - Semi-compression - Tube Design recommendation on request
<b>Accessories</b>	Vacuum adapter Assembly and disassembly cleaning kit Trolley with adjustable height
<b>Spare Parts</b>	Permanent stock - 24 hour delivery
<b>Services</b>	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

