

MF 9000-20 H

MF 9000-20 H

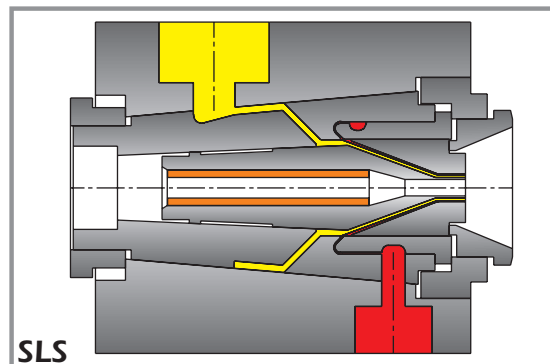
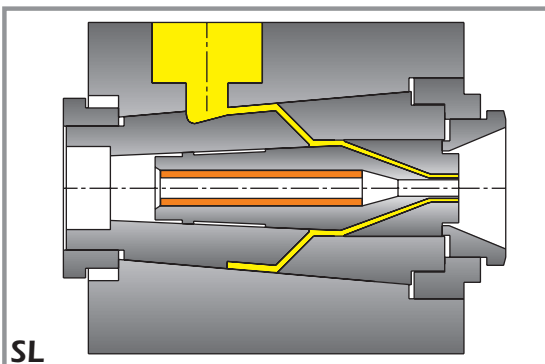
Min conductor	0.2 mm	0.008"
Max conductor	10 mm	0.400"
Max tube die diameter	20 mm	0.800"

Use

Insulation	Small solid and stranded wires
Domain of use	Physical foam FEP
	Special chemical extrusion applications
	Fuel lines
	Data cables
	Plenum cables
	HTW High Technology Wire
Compound	Fluoro polymers PTFE / FEP / PFA

Characteristics
MF 9000-20 H

H	H igh temperature head assembly manufactured from special flouro-resistant alloy
MF	F ixed centering
SL	S ingle L ayer
SLS	S ingle L ayer + S kin or S tripe(s)
Distribution mono-flow	Conical distribution cartridge Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

Design

Options

Connections	Flouro-resistant connecting flanges for any type of extruder
Tooling	Flouro-resistant alloy or Tungsten carbide Tube Special Tooling for physical foam FEP Design recommendation upon request
Accessories	Vacuum adapter Head support Assembly and disassembly cleaning kit
Spare Parts	Permanent stock - 24 hour delivery
Services	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

