

MF 9000-40 DL

MF 9000-40 DL

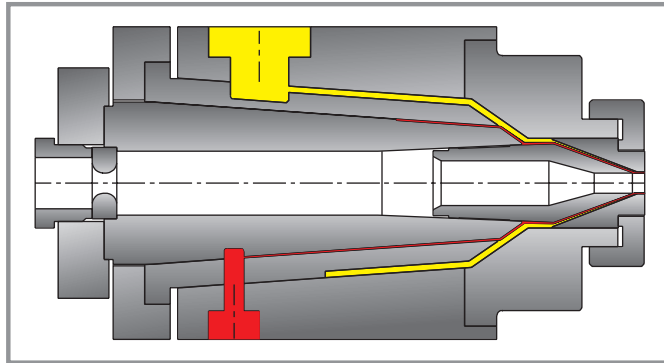
Min conductor	2 mm	0.080"
Max conductor	30 mm	1.200"
Max over insulation	40 mm	1.600"
Max tube die diameter	50 mm	2.000"

Use

Insulation	Solid and stranded wires
Domain of use	Building wire Power cables Submarine cables HTW High Technology Wire
Compound	PVC / PE / LSZH...

Characteristics
MF 9000-40 DL

MF	Fixed centering
DL	Double Layer
Distribution mono-flow	Conical distribution cartridge Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for quick and easy dismantling

Design

Options

Connections	Connecting flanges for any type of extruder
By-Pass	Manual - Pneumatic - Hydraulic
Distributors	Special distribution cartridge for LSZH Mono distribution cartridge for single layer
Tooling	Hardened steel Semi-compression - Tube Design recommendation on request
Accessories	Assembly and disassembly cleaning kit Trolley with adjustable height
Spare Parts	Permanent stock - 24 hour delivery
Services	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

