

MF 9000-50 H SL

## MF 9000-50 H SL

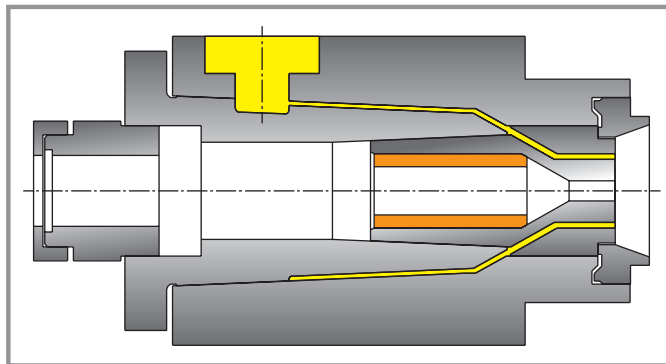
<b>Min conductor</b>	2 mm	0.080"
<b>Max conductor</b>	24 mm	1.000"
<b>Max tube die diameter</b>	50 mm	2.000"

## Use

<b>Insulation</b>	Small solid and stranded wires
<b>Domain of use</b>	Special chemical applications
	Fuel lines
	Data cables
	Plenum cables
	HTW High Technology Wire
	Aeronautic applications
<b>Compound</b>	Fluoro polymers PTFE / FEP / PFA

**Characteristics**
**MF 9000-50 H SL**

<b>H</b>	<b>H</b> igh temperature head assembly manufactured from special flouro-resistant alloy
<b>MF</b>	<b>F</b> ixed centering
<b>SL</b>	<b>S</b> ingle <b>L</b> ayer
<b>Distribution mono-flow</b>	Conical distribution cartridge Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for quick and easy dismantling
<b>Gum Space</b>	Axial die adjustment

**Design**

**Options**

<b>Connections</b>	Flouro-resistant connecting flanges for any type of extruder
<b>Tooling</b>	Flouro-resistant alloy or Tungsten carbide Tube Design recommendation upon request
<b>Accessories</b>	Vacuum adapter Assembly and disassembly cleaning kit Trolley with adjustable height
<b>Spare Parts</b>	Permanent stock - 24 hour delivery
<b>Services</b>	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

