

MF 9000-10 SF-FS

## MF 9000-10 SF-FS

<b>Min conductor</b>	0.1 mm	0.004"
<b>Max conductor</b>	5 mm	0.200"
<b>Max over insulation</b>	10 mm	0.400"

## Use


<b>Insulation</b>	Small solid and stranded wires
<b>Domain of use</b>	High technology wires HTW Minicoax CATV RG types Special wires with inner or outer skin
<b>Compound</b>	Chemical or physical foam, PE ...

## Characteristics

### MF 9000-10 SF-FS

<b>MF</b>	<b>Fixed centering</b>
<b>SF / FS</b>	<b>Skin - Foam or Foam - Skin</b>
<b>Distribution mono-flow</b>	2 conical distribution cartridges
	Easy to clean - no holes or slots - no dead spots
	Constant and smooth compound flow
	No stress and no shear in the melted compound
<b>Gum space</b>	Axial die adjustment

## Design

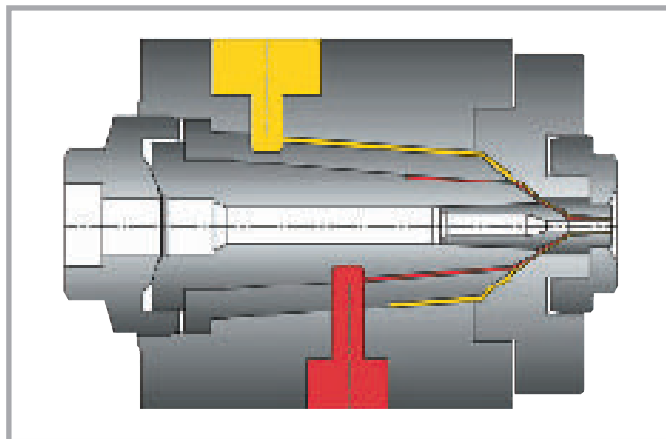

## Options

<b>Connections</b>	Connecting flanges for any type of extruders
<b>By-pass</b>	Manual - Pneumatic - Hydraulic
<b>Tooling</b>	Diamond - Tungsten carbide
	Compression
	Design recommendation per request
<b>Mflex</b>	Microflex system for 100% concentricity
<b>Accessories</b>	Assembly and disassembly cleaning kit
<b>Spare parts</b>	Permanent stock, 24 hours delivery
<b>Services</b>	Microdia answers your request by fax in 24 hours
	Technical assistance - Engineering - Commissioning