

MF 9000-10 SFS

MF 9000-10 SFS

Min conductor	0.1 mm	0.004"
Max conductor	5 mm	0.200"
Max over insulation	10 mm	0.400"

Use


Insulation	Small solid and stranded wires
Domain of use	Telephone wires
	Small CATV cables
	Minicoax
	LAN cat 5-6-7
Compound	Chemical or physical foam, PE ...

Characteristics

MF 9000-10 SFS

MF	Fixed centering
SFS	Skin - Foam - Skin
Distribution	3 conical distribution cartridges Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum space	Axial die adjustment

Design

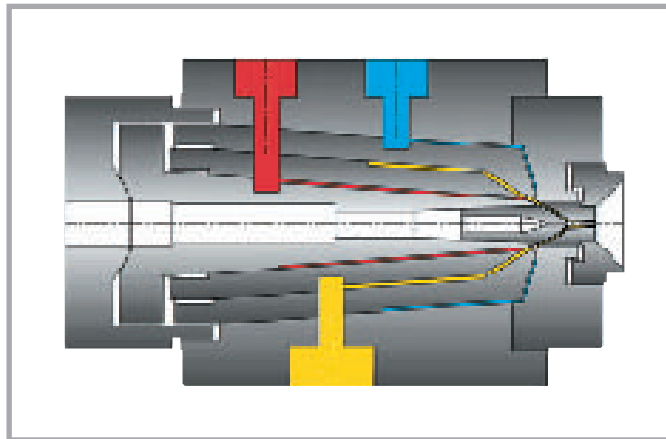

Options

Connections	Connecting flanges for any type of extruders
By-pass	Manual - Pneumatic - Hydraulic
Tooling	Diamond - Tungsten carbide Compression (high concentricity level tooling) Design recommendation on request
Mflex	Microflex system for 100% concentricity
Accessories	Assembly and disassembly cleaning kit
Spare parts	Permanent stock, 24 hours delivery
Services	Microdia answers your request by fax in 24 hours Technical assistance - Engineering - Commissioning