

MX 5000 T ML

MX 5000 T ML

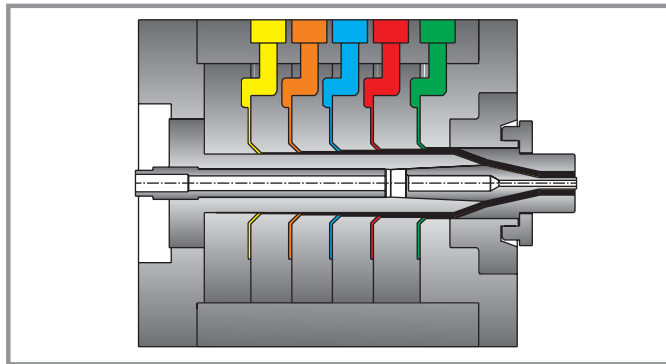
Max tube diameter 40 mm 1.600"

Use

Domain of use	Special fuel tubes
	Domestic heating tubes
	Pneumatic tubes
	Gas lines
	Automotive tubes
Compound	Technical tubes
	PE / VPDE / PP / PA / EVOH tube

Characteristics **MX 5000 T ML**

MX	Manual centering
T	Tube extrusion crosshead
ML	Multi-Layer
Distribution mono-flow	3-5 radial distribution cartridges Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
Gum Space	Axial die adjustment

Design

Options

Connections	Connecting flanges for any type of extruder
By-Pass	Manual - Pneumatic - Hydraulic
Tooling	Hardened steel Tube Special tooling Design recommendation on request
Accessories	Assembly and disassembly cleaning kit Trolley with adjustable height
Spare Parts	Permanent stock - 24 hour delivery
Services	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

