

# MX 9000-200

## MX 9000-200

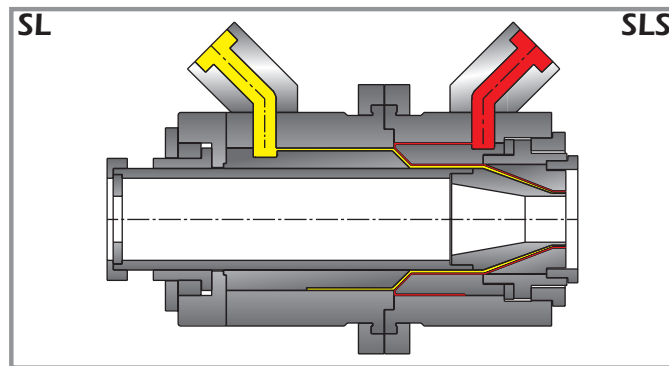
<b>Min conductor</b>	10 mm	0.400"
<b>Max conductor</b>	150 mm	5.900"
<b>Max over insulation</b>	160 mm	6.300"
<b>Max tube die diameter</b>	200 mm	8.000"

## Use

<b>Domain of use</b>	Jacketing for any type of cable assembly up to 150 mm
<b>Compound</b>	PVC / PE / LSZH...

**Characteristics** **MX 9000-200**

<b>MX</b>	Manual centering
<b>SL</b>	Single Layer
<b>SLS</b>	Single Layer + Skin or Stripe(s)
<b>Distribution mono-flow</b>	Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for quick and easy dismantling
<b>Gum Space</b>	A bearing allows the axial adjustment of the wire-guide from the rear of the crosshead, even while under pressure

**Design**

**Options**

<b>Connections</b>	Connecting flanges for any type of extruder
<b>By-Pass</b>	Manual - Pneumatic - Hydraulic
<b>Distributors</b>	Special distribution cartridge for <b>LSZH</b>
<b>Tooling</b>	Hardened steel Semi-compression - Tube Design recommendation on request
<b>Accessories</b>	Assembly and disassembly cleaning kit Trolley with adjustable height
<b>Spare Parts</b>	Permanent stock - 24 hour delivery
<b>Services</b>	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

