

**Mflex 3000-10 T SL**

**Mflex 3000-10 T SL**

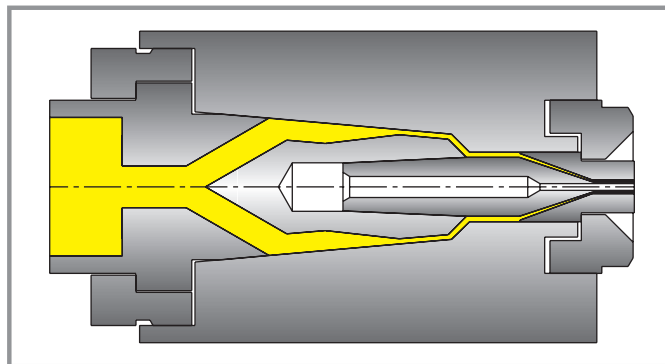
**Max tube die diameter** 12 mm 0.500"

**Use**

<b>Domain of use</b>	Precision medical tubing
	Calibrated tubes
	Pneumatic tubes
	Technical tubes
<b>Compound</b>	PVC / PE / PA / PUR...

**Characteristics**
**Mflex 3000-10 T SL**

<b>Mflex</b>	<b>Microflex</b> system for 100% concentricity
<b>T</b>	<b>Tube In-line</b> extrusion head
<b>SL</b>	<b>Single Layer</b>
<b>Distribution mono-flow</b>	Conical distribution cartridge Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
<b>Gum Space</b>	Axial die adjustment

**Design**

**Options**

<b>Connections</b>	Connecting flanges for any type of extruder
<b>By-pass</b>	Manual - Pneumatic
<b>Tooling</b>	Hardened steel - Tungsten carbide Special tooling Design recommendation on request
<b>Accessories</b>	Vacuum adapter Assembly and disassembly cleaning kit
<b>Spare Parts</b>	Permanent stock - 24 hour delivery
<b>Services</b>	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

