

**mflex 9000-20 DL**

**Mflex 9000-20 DL**

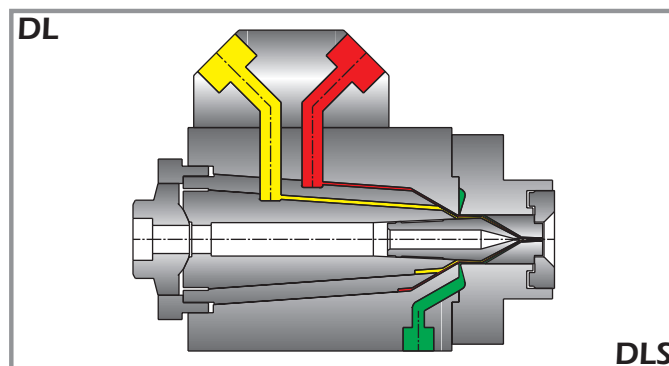
<b>Min conductor</b>	0.2 mm	0.010"
<b>Max conductor</b>	12 mm	0.480"
<b>Max over insulation</b>	16 mm	0.630"
<b>Max tube die diameter</b>	20 mm	0.800"

**Use**

<b>Insulation</b>	Solid and stranded wires
<b>Domain of use</b>	Jacketing
	CATV - Coaxial cables - RG
	Automotive wires
	Building wires
	Calibrated tubes
	Flexible tubes
<b>Compound</b>	Profiled cables
	PVC / PE / LSZH...

**Characteristics**
**Mflex 9000-20 DL**

<b>Mflex</b>	<b>Microflex</b> system for 100% concentricity
<b>DL</b>	<b>Double Layer</b>
<b>DLS</b>	<b>Double Layer + Stripe(s)</b>
<b>Distribution</b>	Conical distribution cartridge
<b>mono-flow</b>	Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound
<b>Gum Space</b>	Axial die adjustment

**Design**

**Options**

<b>Connections</b>	Connecting flanges for any type of extruder
<b>By-Pass</b>	Manual - Pneumatic - Hydraulic
<b>Distributors</b>	Special distribution cartridges for <b>LSZH</b> Mono distribution cartridge for single layer
<b>Tooling</b>	Hardened steel - Tungsten carbide - Diamond Compression - Semi-compression - Tube Special tooling - Twin cable High concentricity level Design recommendation on request
<b>Accessories</b>	Assembly and disassembly cleaning kit
<b>Spare Parts</b>	Permanent stock - 24 hours delivery
<b>Services</b>	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

