

# Mflex 9000-45

## Mflex 9000-45

<b>Min conductor</b>	2 mm	0.080"
<b>Max conductor</b>	35 mm	1.400"
<b>Max over insulation</b>	40 mm	1.600"
<b>Max tube die diameter</b>	45 mm	1.800"


## Use

<b>Domain of use</b>	Jacketing with any type of cable assembly up to 35 mm CATV - Foam-Skin Fiber optic carrier tubes Coaxial RG cables
<b>Compound</b>	PVC / PE / PA / LSZH...

## Characteristics Mflex 9000-45

<b>Mflex</b>	Microflex system for 100% concentricity
<b>SL</b>	Single Layer
<b>SLS</b>	Single Layer + Skin or Stripe(s)
<b>Distribution mono-flow</b>	Conical distribution cartridge Easy to clean - no holes or slots - no dead spots Constant and smooth compound flow No stress and no shear in the melted compound Distributor support for quick and easy dismantling
<b>Gum Space</b>	A bearing allows the axial adjustment of the wire-guide from the rear of the crosshead, even while under pressure

## Design

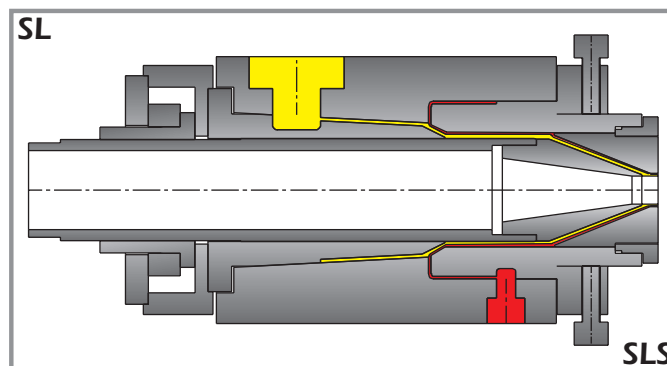

## Options

<b>Connections</b>	Connecting flanges for any type of extruder
<b>By-Pass</b>	Manual - Pneumatic - Hydraulic
<b>Distributors</b>	Special distribution cartridges for <b>LSZH</b> Mono distribution cartridge for foam
<b>Tooling</b>	Hardened steel Semi-compression - Tube High concentricity level Design recommendation on request
<b>Accessories</b>	Vacuum adapter Assembly and disassembly cleaning kit Trolley with adjustable height
<b>Spare Parts</b>	Permanent stock - 24 hours delivery
<b>Services</b>	Microdia answers your request by fax within 24 hours Technical assistance - Engineering - Commissioning

